




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/66</b>	<b>A2</b>	(11) International Publication Number: <b>WO 99/17506</b> (43) International Publication Date: 8 April 1999 (08.04.99)
(21) International Application Number: PCT/NO98/00253 (22) International Filing Date: 26 August 1998 (26.08.98) (30) Priority Data: 974487                      29 September 1997 (29.09.97)    NO (71) Applicant (for all designated States except US): TELEFONAK- TIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stock- holm (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): HAGA, Børge [NO/NO]; Grinda 9A, N-0861 Oslo (NO). (74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M, N-0306 Oslo (NO).	(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published Without international search report and to be republished upon receipt of that report.	

(54) Title: METHOD FOR ROUTING CALLS FROM A TERMINAL IN A FIRST TELECOMMUNICATION NETWORK TO ANY TERMINAL IN AN EXTERNAL TELECOMMUNICATION NETWORK

## (57) Abstract

The present invention relates to a method for routing calls from a terminal in a first telecommunication network, for example an intranet, to any terminal in an external telecommunication network, the interworking between said networks taking place through one of several interworking units or so-called gateways (GW), and in order to provide a method which in a more effective manner can optimise such interworking between such networks, it is according to the present invention suggested that there is used at least one routing entity which routes the call or calls through a gateway (GW1, GW2) giving the most optimal route, for example the most cost effective or resource effective route.

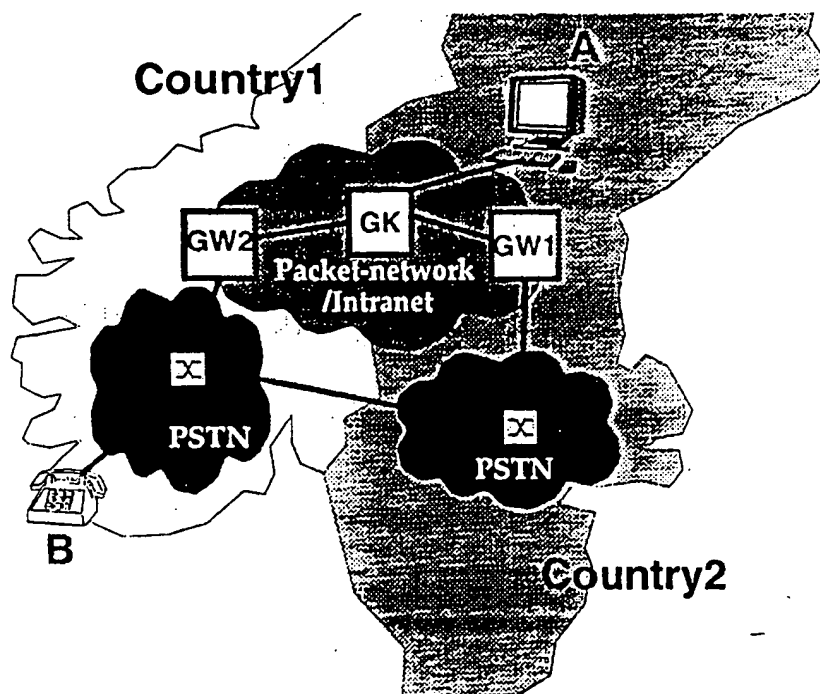

BEST AVAILABLE COPY

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR ROUTING CALLS FROM A TERMINAL IN A FIRST  
TELECOMMUNICATION NETWORK TO ANY TERMINAL IN AN EXTERNAL  
TELECOMMUNICATION NETWORK

5

Field of the invention

The present invention relates to a method for routing  
calls from a terminal in a first telecommunication net-  
work, for example an intranet, to any terminal in an ex-  
ternal telecommunication network, the interworking be-  
tween said networks taking place through one of several  
interworking units or so-called gateways.

15 

Background of the invention

The problem areas

*Problem*

20 Intranets can exceed country borders, and in fact many  
corporate networks are covering nearly the whole world.  
The cost of communicating within an intranet is usually  
much lower than using external communication services,  
and the intranets usually do not see the country borders.  
25 This means that the cost of communicating within an in-  
tranet is less dependant on the geographical distance be-  
tween the endpoints and more on initial investment in  
network infrastructure. This is in sharp contrast to the  
charging involved when using commercial telephone ser-  
vices, where distance and duration of call more directly  
30 determines the cost of a call.

New emerging standards within video and audio conferen-  
cing now make it possible to have audio and video con-  
ferences/calls within PSTN (ISDN) networks, the Internet,  
35 Intranets and Local Area Networks.

Since other network domains now support making audio and  
video conferences/calls, the need for ways of interwork-

ing between these different kind of networks has emerged.  
These interworking units are called gateways, and they  
provide the conversions necessary (protocol, audio for-  
mat, video format etc.) for endpoint/terminals residing  
5 in different kinds of networks, to be able to communicate  
with each other.

There are no limitations on the number of gateways which  
can be connected to these networks, which means that an  
10 intranet can have access to several gateways in order for  
a terminal inside the intranet to call e.g. an ISDN video  
conferencing terminal.

Because of cost issues it would be desirable for example  
15 to establish a connection through the gateway residing  
closest to the receiving party on e.g. the PSTN or ISDN  
network. For example, since an intranet can cross country  
borders it could be desirable to place one gateway in  
each country and avoid expensive international calls by  
20 always calling out through the gateway residing in the  
country where the receiving party is located.

*Known solutions and problems with these*

Related problems have probably been solved for circuit-  
25 switched (telephony) networks, where routing tables  
assure that distributed companies with local telephone  
networks route as much as possible of each call within  
the local network before entering the public telephony  
network. This should apply to packet networks (intranets,  
30 LANs etc.) as well, but routing tables must with this so-  
lution be entered manually. This invention proposes inter-  
alia a way for a dynamic generation of routing tables for  
audiovisual communication when going from packet-networks  
to other networks (circuit- and packet networks) via  
35 gateways by the automatic update of routing information  
from gateways to the routing entities within the packet  
network.

### Objects of the invention

An object of the invention is to provide a method whereby such routing of calls can be affected in a generally most  
5 optimal manner.

Another object of the invention is to provide a method wherein such routing may be affected in the most cost effective manner.

10

Still another object of the present invention is to provide wherein such routing may be affected in the most resource effective manner.

15 Yet another object of the invention is to provide a method selection of network operators may be made in an effective manner.

An object of the invention is also to provide a combined  
20 optimalization of such routing and selection.

### Brief discussion of the invention

These objects are achieved by a method as stated in the  
25 preamble, which according to the present invention is characterized in that there is used at least one routing entity which routes the call or calls through a gateway (GW1, GW2) giving the most optimal route, for example the most cost effective or resource effective route.

30

In other words, the invention proposes inter alia to automatically route interworking calls (i.e. over gateways) from packet-networks through the gateway giving the most cost effective charge by using a routing table which  
35 is automatically updated each time a new gateway is introduced into the network.

Reference in this invention proposal is done for example towards an emerging ITU standard H.323 for IP based

video/audio/data conferencing, but the invention should apply equally to packet networks in which registering functions are available and calls to other networks are available (e.g. Internet, Intranet telephony, voice over  
5 IP, etc.).

In a specific embodiment of the invention the key approach is for the routing entity (from now on referred to as gatekeeper, logical switch, when referring to audio-  
10 visual communication on packet networks) to know which gateways exist, and in what country or region they are connected to the public telephony network. When the gatekeeper knows this, it can for example analyse parts of the E.164 number (given to the gatekeeper by the caller  
15 residing inside the packet-network/intranet upon initiation of an interworking call) for the receiving party outside the intranet in order to route the call to the most appropriate gateway. In this way as much as possible of the call propagates within the packet-network/intranet  
20 and that the most local gateway to the receiving party (charging wise) is selected for putting the call out on the public telephony network.

Further features and advantages will appear from the following description taken in connection with enclosed  
25 drawings, as well as from the appending patent claims.

#### Brief disclosure of the drawings

30 Fig. 1 is a simplified view indicating a first embodiment of network configurations, wherein the method according to the present invention can be applied.

Fig. 2 is an extract of Fig. 1, on a larger scale, and  
35 completed with further details including an appropriate table.

Fig. 3 is a simplified view illustrating another embodiment of the present method, especially the use of gate-

way-table for operator priority.

Fig. 4 is a simplified view of still another embodiment of a network configuration wherein the method according to the invention can be applied, especially in connection with use of gateway-table for resource management.

Fig. 5 illustrate a table wherein various gateway functions are combined.

10

Fig. 6 is yet another network configuration illustrating another aspect of the present invention, especially in connection with using an intranet with optimizing gateways as a transferring network or backbone for two or more external networks.

15

#### Detailed description of embodiments

In connection with Fig. 1 there is illustrated an example of how the method according to the present invention can be applied. Basically, the invention suggests a method for routing calls from a terminal in a first telecommunication network, for example an intranet or a packet-network; to any terminal, for example terminal B, in an external telecommunication network, PSTN, the interworking between said networks taking place through one of several interworking units or so-called gateways, GW1 and GW2.

Fig. 1 is a simplified view. A more complex view would be where the intranet includes several gatekeepers and at least two types of gateways (i.e. gateways to both PSTN(POTS) which is audio only, and gateways to ISDN videoconferencing with both video and audio).

35

Caller A wants to make a call to receiving party B. Caller A is calling from a terminal (e.g. a PC-terminal with client software and hardware compliant with ITU-T H.323 (ref. 1), while receiving party B is using a POTS

telephone. The gatekeeper GK, being the logical switch, is responsible for routing the call to the appropriate gateway. The issue is for the gatekeeper to choose GW2 for the call since that gateway resides in the same  
5 country as the receiving party B and therefore will lead to a less expensive call since it will be a national call instead of an international call. Choosing GW1 will lead to an international call between for example Sweden and Norway over the PSTN network.

10

When a gateway is introduced into the intranet, it has to register with the gatekeeper(s) (according to standards for audio-visual communication over packet networks i.e. ITU-T H.323 (ref. 1)).

15

The gateway initiates this by sending out a multicast message (according to ITU-T H.225 section for RAS signaling (ref. 4)) called GRQ (Gatekeeper Request). The gatekeeper which is willing to take the gateways registration  
20 will return a GCF (Gatekeeper confirmation).

Upon receiving the GCF, the gateway will send an RRQ (Registration Request) to the gatekeeper which has accepted its registration. One of the message fields in this  
25 message is called **nonStandardData**. It is part of this invention's idea to use this field (until a more specific country- or area-code attribute is specified for this message) to send the country (or area) code for the PSTN network this gateway connects to. The gatekeeper will  
30 store this country code in a table either locally or in a central database for the whole intranet. The latter is necessary if several gatekeepers coexist in the intranet. The table will have at least 2 columns, where one is the country code (according to E.164 ref.3)) and the other  
35 is the **callSignalAddress** (sequence of TransportAddress) (ITU-T H.225 (ref.4)).

A complete table of all the gateways will be registered in this gateway-table, as shown in Fig. 2, and in addi-



tion an entry will be added to the table describing which address to connect to as default.

When caller A wants to set up a call to receiving party B  
5 (+47 66842634), the gatekeeper will analyse the country code part of the E.164 (ref. 3) **destinationAddress** in the **Setup** (ITU-T H.225 (ref. 4)) message from caller A to the gatekeeper. By doing a lookup in the gateway-table, the gatekeeper will find that a gateway connecting to country  
10 code 47 is reachable from the intranet. The gatekeeper will then use the corresponding **callSignalAddress** entry to route the call to the gateway which is residing in the same country as the receiving party. If the gatekeeper is unable to find a matching country code entry in the gate-  
15 way-table, the gatekeeper will use the **callSignalAddress** associated with the default entry in the table.

In the particular example the gatekeeper will see that caller A wants to call 47 66842634, and therefore use the  
20 table to find out that GW2 should be contacted at address **www.xxx.yyy.zzz**.

It is to be understood that there is no limitation on this invention saying that this should apply to intranets  
25 crossing country borders only.

One could use the present method for intranets crossing areas within a country as well, since calling within one area of the country is usually cheaper than crossing ar-  
30 eas. In this case the gateway-table would have to be enhanced with an additional column listing the different gateways' area codes (in addition to their country code).

In addition to this, and as illustrated in Fig. 2, it  
35 could be advantageous to add more intelligence to the search for the best gateway. In cases where a matching country (or area) code is not found, it could be desirable to introduce a scheme/algorithm where the country (or area) code closest in number value to the desired one

is chosen instead of the default entry. This is based on the fact that country (and area) codes for adjacent countries (or areas) usually has adjacent numbers for country (and area code). In cases where this is not good enough, the gateway table can be manually configured to map country (and area) codes having no gateway represented, to existing gateways in the closest country (or area) charging-wise. E.g. if an intranet has gateways to Sweden and Italy and a caller inside the intranet wants to call an external destination in Norway, it would probably be wise to route the call through the gateway in Sweden. This means that an entry for country code 47 (Norway) would be manually configured to map to the **callSignalAddress** of the gateway residing in Sweden.

In the new situation arising many places in the world where traditional telephone operators no longer has monopoly in their own countries, it could be advantageous to be able to route calls more intelligently depending on which operator gives the best offer at any time. With this invention this could be done by letting the gateway register with information on what operator is connected to the gateway on the PSTN/telephone network side. The gatekeeper(s) would keep a table updated (by adding information as gateways register) of all the gateways addresses and their corresponding PSTN operators. The table could be arranged as illustrated in Fig. 3, and then so that the operator giving the best offer on PSTN/telephony charge at any time would be listed at the top with highest priority. This will make it possible to negotiate better deals with the different operators by easily being able to switch priority of gateway choice.

So far this invention proposal has focused on the charging issue of the invention. The invention can however be applied in a way where focus is on e.g. quality of service or resource handling, as this is illustrated in Fig. 4. The only difference would be the implementation of the gateway table and what data is sent from the gateways

upon registration. More precisely, if e.g. the gateways send along the total number of ports (lowest bandwidth resolution line it has available e.g. 64kbit/s - higher bandwidth is served with one call using several ports on the gateway e.g. 384kbit/s = 6 x 64kbit/s = 6 ports) to the gatekeeper(s), a table can be made showing available ports available at any time. If a gatekeeper wants to set up a call through a gateway, it would refer to the table and see which gateway has available ports and thereby do resource management. After selecting a gateway with available ports, the number of available ports available for the chosen gateway will have to be reduced by the amount of ports the current call is using. Upon completion of the call, the gatekeeper will have to add the number of ports to this gateway in the table. If all entries in the table have 0 ports available, the call would have to be rejected as there are no gateway ports available to support the call.

The introduction of different criteria for routing calls leads to the combined solution where country code, operator and number of ports are integrated into one table to give a more intelligent way of routing calls, which is illustrated by the Table in Fig. 5.

The table could be designed to match the criteria the "owner" of the intranet wants to use when making external calls through gateways. By this is meant that e.g. in the case where someone wants to make a call to country code 47, and all ports on the preferred operators gateway to that country is occupied, one might choose to do one of the following:

1. Choose same operator, but go through gateway residing in another country, or...

2. Choose next operator on the list, which has a gateway to country 47 with available resources (ports).

In Fig. 6 there is illustrated how the invention could also be used when one wishes to use the packet network (intranet) as a transport or backbone network for other external networks. Subscriber C is a PSTN subscriber, and he wishes to call another PSTN subscriber in e.g. another country or region. He would normally just call the number to B and have the call set up through the international or national PSTN network. However, another option would be for C to call a gateway to a packet network (intranet) and route the call through that network in order to avoid expensive long distance calls or in cases where subscriber B cannot be reached directly going only over the PSTN network (e.g. errors on line, all lines occupied etc.). The packet network would then use the invention described earlier in this document to route the call to the gateway residing closest chargingwise to subscriber B. In order for subscriber C to call B this way he must input number both to the gateway he wishes to use going into the packet network and the number to subscriber B. This however, is not different from a traditional call into the packet-network from an external network and hence will not be further described here.

## 25    **Advantages**

The invention gives the owner of the intranet:

Cost reductions since the number of expensive international or long distance calls can be reduced since gateways can be put in countries which the intranet already has direct access to and has a considerable amount of traffic to. Other solutions have been proposed that should make the owner of the intranet able to negotiate better deals with telephony operators by the use of gateway routing tables.

Flexibility to negotiate better deals with different telephony service providers by automatically routing the

bulk part of the calls to the provider with the best offer (e.g. by setting the number 1 priority or default entry in the gateway-table to point to the "best offer" provider).

5

Load distribution by selecting different gateways for different destinations and thereby automatically distribute load geographically.

- 10 Redundancy if gatekeeper can choose another gateway in another area/country if problems arise in another gateway or public telephony network.

15 Resource Management through scan of ports available at any time at each gateway.

Use of intranet as transport or backbone network for external networks.

## P a t e n t   c l a i m s

1. Method for routing calls from a terminal in a first telecommunication network, for example an intranet, to  
5 any terminal in an external telecommunication network, the interworking between said networks taking place through one of several interworking units or so-called gateways (GW),  
c h a r a c t e r i z e d   i n   that there is used at  
10 least one routing entity which routes the call or calls through a gateway (GW1, GW2) giving the most optimal route, for example the most cost effective or resource effective route.
- 15 2. Method as claimed in claim 1,  
c h a r a c t e r i z e d   i n   that in the routing entity, also called a gatekeeper (GK) there is established a routing table, which is automatically updated each time a gateway change occurs, for example by addition or re-  
20 moval of such gateways (GW1, GW2).
3. Method as claimed in claim 1 or 2,  
c h a r a c t e r i z e d   i n   that said routing entity or gatekeeper (GK) is arranged to route a call from said  
25 first network to said second network through a selected country or region dependent gateway (GW2).
4. Method as claimed in claims 1-3,  
c h a r a c t e r i z e d   i n   that said gatekeeper  
30 (GK) comprises a routing table containing interalia information about the geographical location of any gateway (GW1, GW2).
5. Method as claimed in claims 1-4,  
35 c h a r a c t e r i z e d   i n   that said gatekeeper (GK) comprises a routing table containing telephone numbers or parts thereof reflecting a country and/or region code, for example E.164 numbers for external networks.

6. Method as claimed in claim 5,  
c h a r a c t e r i z e d i n that said gatekeeper  
(GK) is adapted to use said country and/or region code  
part of said E.164 numbers as a criterion for selecting  
5 the most optimal, especially the most cost effective  
route to the associated terminal in one of said external  
networks.
7. Method as claimed in claim 1 or 2,  
10 c h a r a c t e r i z e d i n that in said routing en-  
tity or gatekeeper (GK) there is established a table re-  
flecting quality of service (QoS) or available resources  
for each gateway (GW1, GW2).
- 15 8. Method as claimed in claim 7,  
c h a r a c t e r i z e d i n that said table reflects  
available ports at any gateway (GW1, GW2) at any time.
9. Method as claimed in claim 7 or 8,  
20 c h a r a c t e r i z e d i n that the gatekeeper (GK)  
is adapted to select an optimum quality of service or re-  
source availability, depending on the call to be made,  
i.e., audio call, audio and video call, data call, etc.
- 25 10. Method as claimed in claim 1 or 2,  
c h a r a c t e r i z e d i n that in said routing en-  
tity or gatekeeper (GK) there is established a table re-  
flecting cost levels of several network operators, espe-  
cially operators of external networks, i.e. connected to  
30 any gateway (GW1, GW2) on the PSTN/telephone network  
side.
11. Method as claimed in claim 1 or 2 or 10,  
c h a r a c t e r i z e d i n that the gatekeeper (GK)  
35 is adapted to select a gateway by means of table in claim  
10 to choose the operator of external network which  
supplies the most cost-effective external connection.
12. Method as claimed in any of the preceding claims,

characterized in that in said routing entity or gatekeeper (GK) there is established a table, which in combination reflects country or region dependent gateways (GW1, GW2) or/and quality of service or resource availability or/and cost level of several network operators.

13. Method as claimed in any of the preceding claims, characterized in that a first gateway (GWI) is used for establishing a route from a first external telecommunication network (PSTN I) to the gatekeeper (GK) of said intranet, and that said gatekeeper (GK) uses a second gateway (GW II) to extend said route to a second external telecommunication network (PSTN II).

14. Method as claimed in claim 13, characterized in that said intranet with its route optimizing gateways (GW1, GW2; GWI, GWII) is used as a transferring network or backbone for two or more external networks (PSTN I, PSTN II).





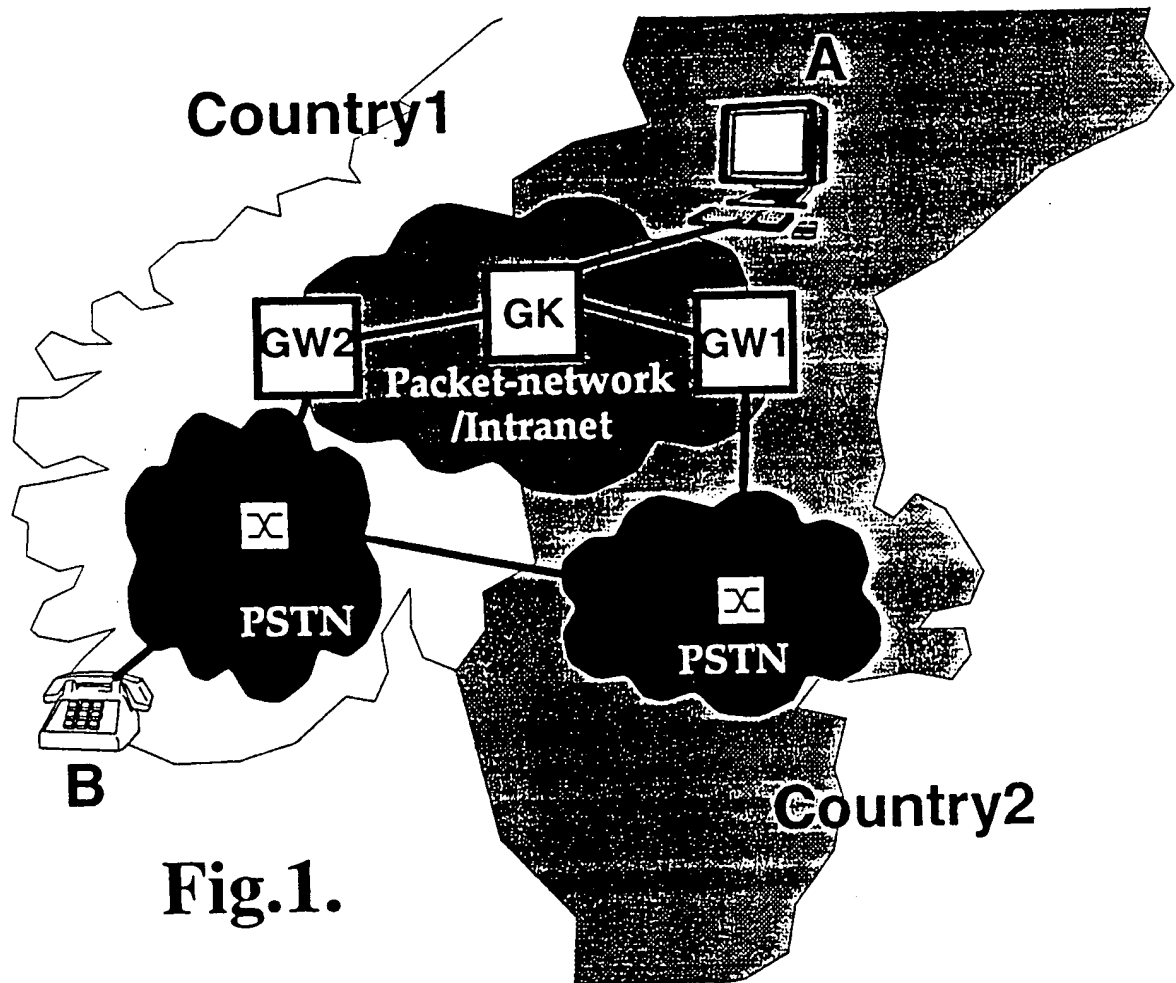


Fig.1.


2/6

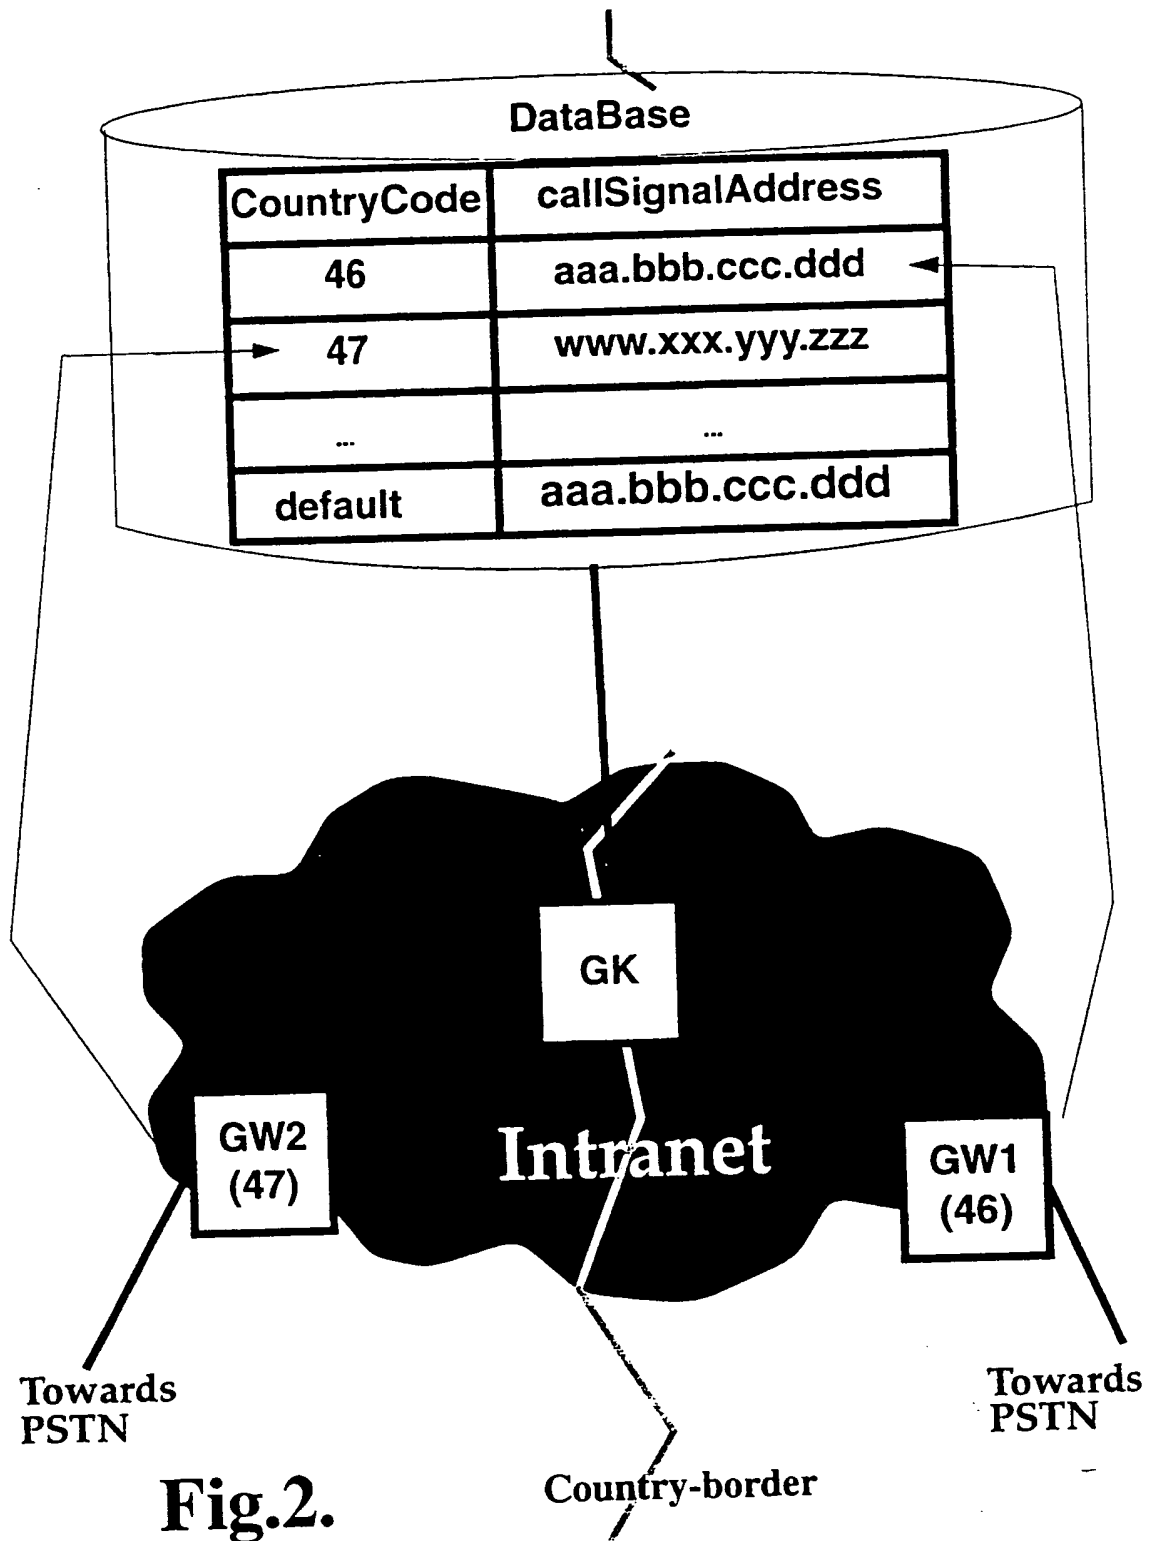

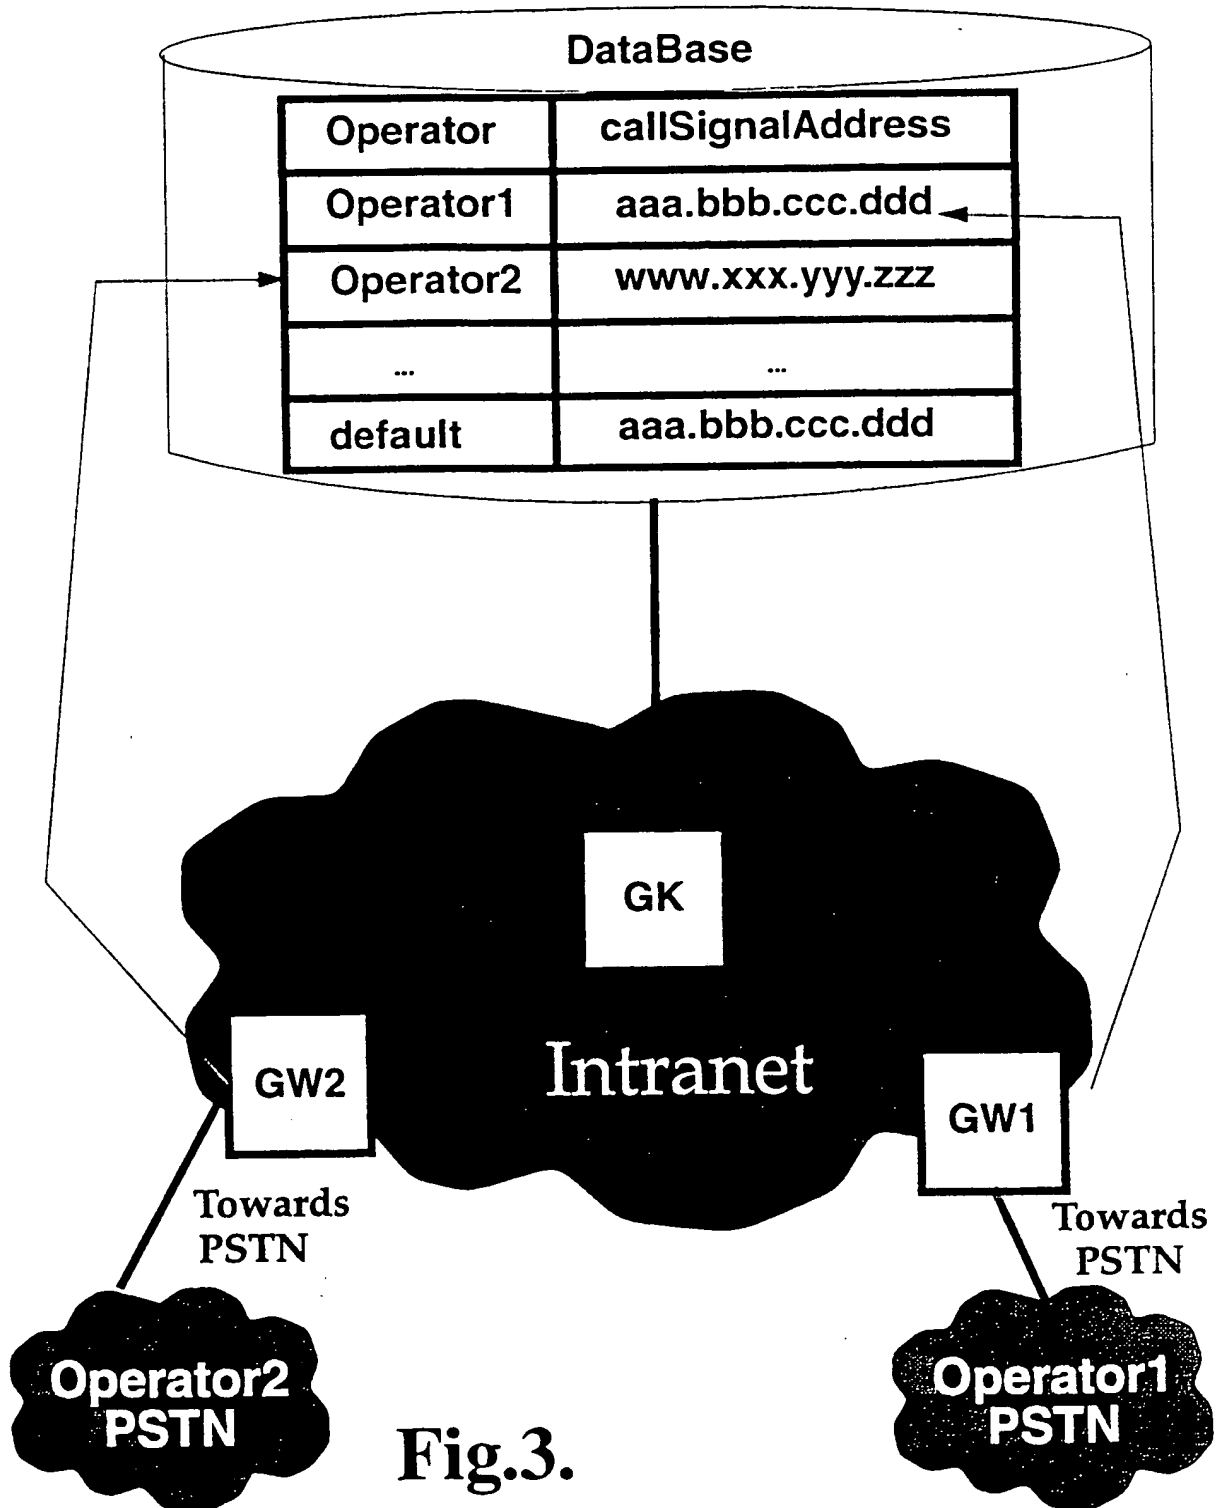

**BEST AVAILABLE COPY**

4/6

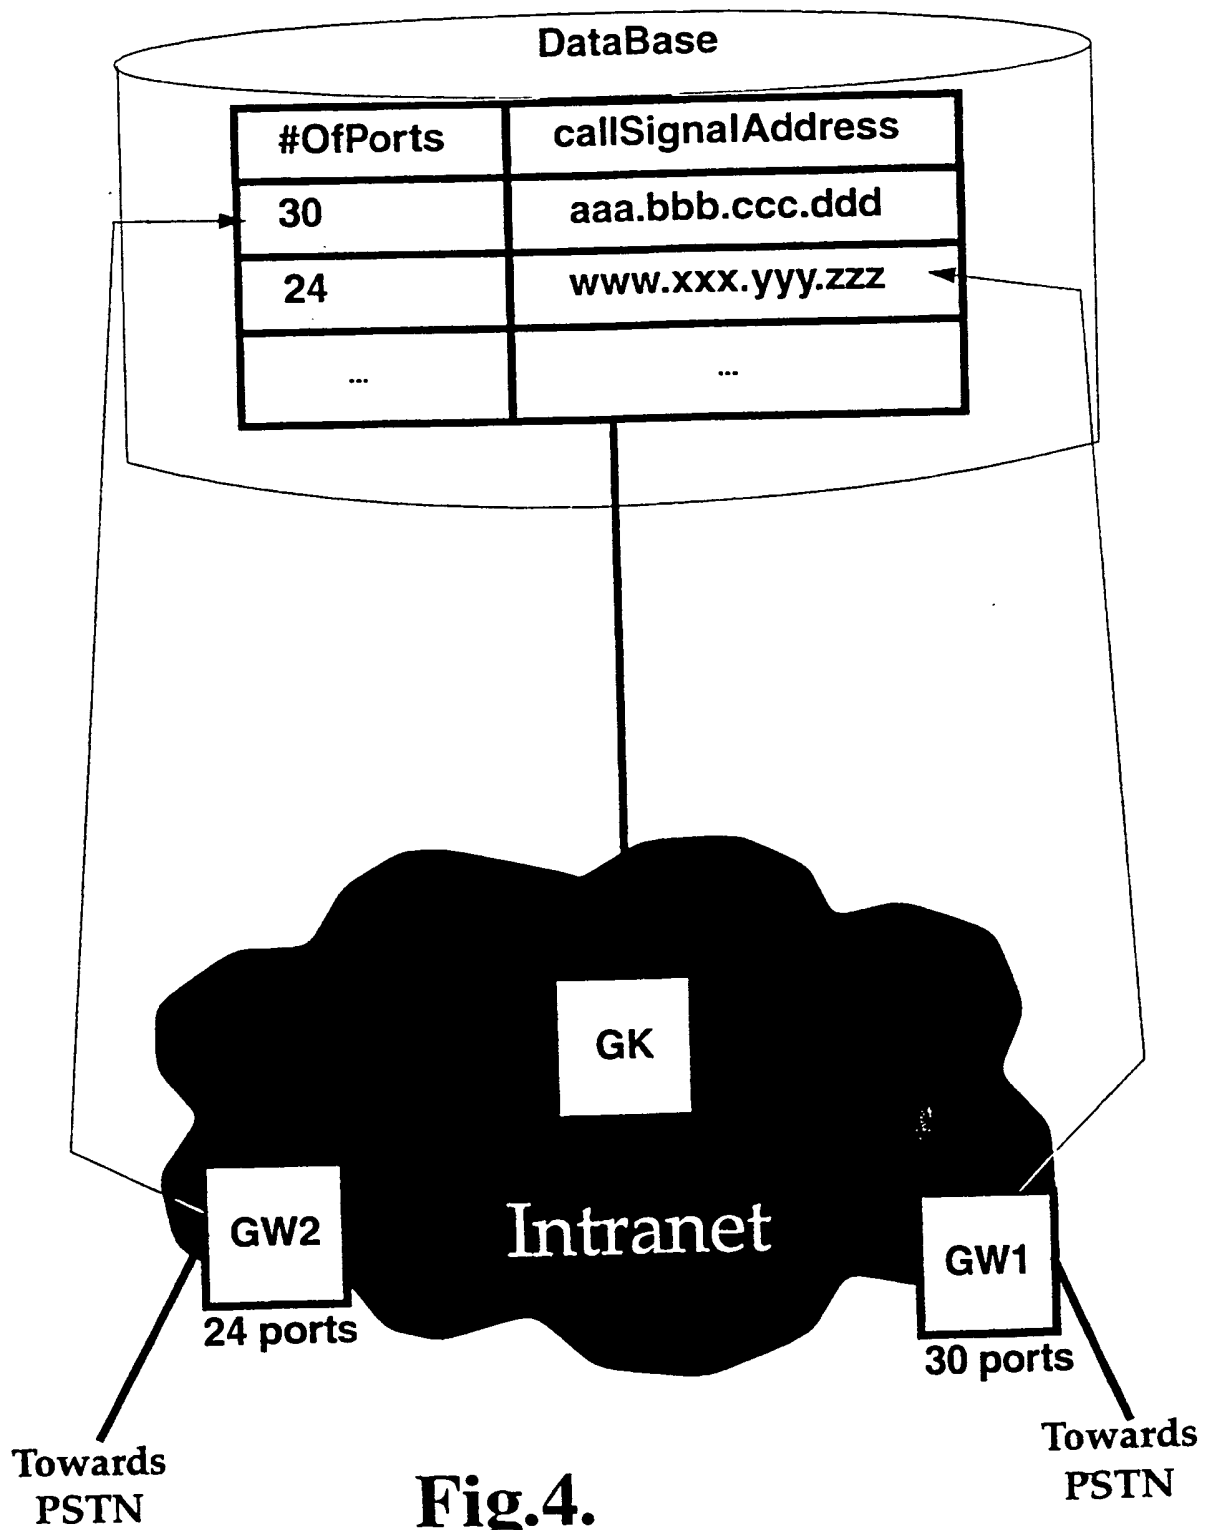

Operator	CountryCode	#OfPorts	CallSignalAddress
Operator1	47	30	aaa.bbb.ccc.ddd
Operator1	46	24	eee.fff.ggg.hhh
Operator1	45	30	iii.jjj.kkk.lll
Operator2	47	30	mmm.nnn.ooo.ppp
Operator2	46	24	qqq.rrr.sss.ttt
Operator3	47	30	uuu.vvv.www.xxx
Operator4	46	24	yyy.aaa.bbb.ccc
...	...	...	...
Default	any	30	zzz.aaa.bbb.ccc

**Fig.5.**


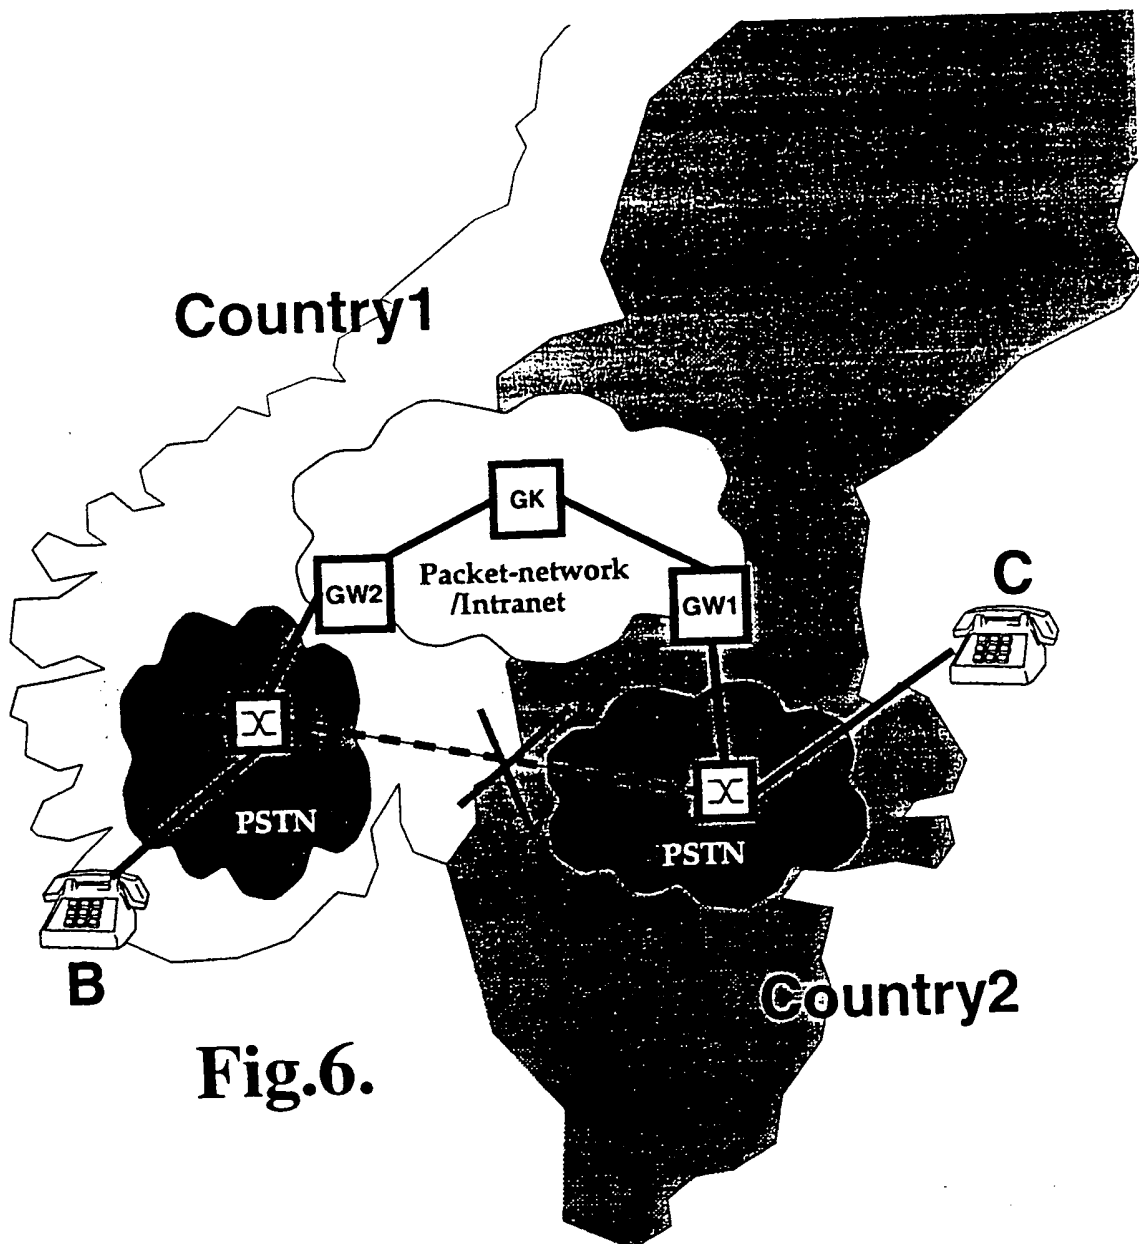


Fig.6.

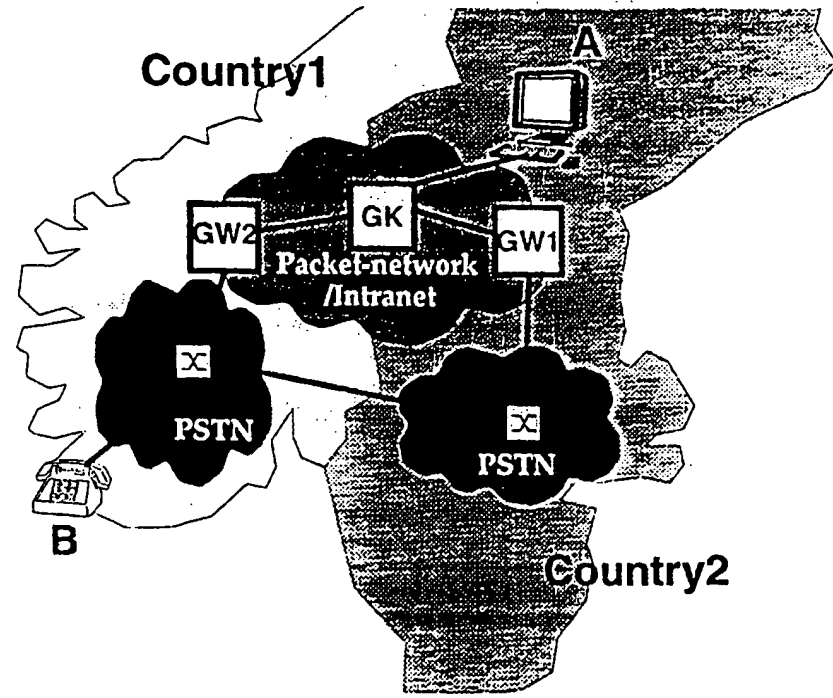

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04L 12/66, 12/46, H04M 11/00</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 99/17506</b> <b>(43) International Publication Date:</b> 8 April 1999 (08.04.99)
<b>(21) International Application Number:</b> PCT/NO98/00253 <b>(22) International Filing Date:</b> 26 August 1998 (26.08.98)  <b>(30) Priority Data:</b> 974487 29 September 1997 (29.09.97) NO  <b>(71) Applicant (for all designated States except US):</b> TELEFONAK- TIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stock- holm (SE).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> HAGA, Børge [NO/NO]; Grinda 9A, N-0861 Oslo (NO).  <b>(74) Agent:</b> OSLO PATENTKONTOR AS; Postboks 7007 M, N-0306 Oslo (NO).		<b>(81) Designated States:</b> AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims</i> <i>and to be republished in the event of the receipt of amendments.</i>  <b>(88) Date of publication of the international search report:</b> 17 June 1999 (17.06.99)
<b>(54) Title:</b> METHOD FOR ROUTING CALLS FROM A TERMINAL IN A FIRST TELECOMMUNICATION NETWORK TO ANY TERMINAL IN AN EXTERNAL TELECOMMUNICATION NETWORK		
<b>(57) Abstract</b> <p>The present invention relates to a method for routing calls from a terminal in a first telecommunication network, for example an intranet, to any terminal in an external telecommunication network, the interworking between said networks taking place through one of several interworking units or so-called gateways (GW), and in order to provide a method which in a more effective manner can optimise such interworking between such networks, it is according to the present invention suggested that there is used at least one routing entity which routes the call or calls through a gateway (GW1, GW2) giving the most optimal route, for example the most cost effective or resource effective route.</p>  <p>The diagram illustrates a network architecture for routing calls. It shows a central 'Packet-network / Intranet' connected to two 'PSTN' (Public Switched Telephone Network) networks. The first PSTN network is located in 'Country 1' and contains a terminal 'B'. The second PSTN network is located in 'Country 2'. The Packet-network is connected to both PSTN networks via gateways 'GW1' and 'GW2'. A terminal 'A' is shown within the Packet-network. The diagram also shows a 'GK' (Gateway) and a 'PSTN' icon within the Packet-network area.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 98/00253

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04L 12/66, H04L 12/46, H04M 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9714238 A1 (INTERNATIONAL DISCOUNT TELECOMMUNICATIONS CORP), 17 April 1997 (17.04.97), page 3, line 13 - line 27; page 8, line 24 - page 9, line 14; page 16, line 12 - page 17, line 8 --	1-14
X	WO 9716916 A1 (TELECOM INTERNET LTD), 9 May 1997 (09.05.97), page 7, line 15 - page 8, line 5; page 9, line 10 - line 22; page 10, line 9 - page 13, line 28 --	1-14
X	WO 9727692 A1 (FIRETALK, INC.), 31 July 1997 (31.07.97), page 7, line 1 - line 17; page 8, line 9 - line 19; page 10, line 24 - page 11, line 16 --	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 April 1999

Date of mailing of the international search report

28-04-1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hermansson

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 98/00253

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Computer Sweden, Volume, No 73, November 1996, (Sweden), T. Zirn, "BILLIG INTERNET-TELEFONI - VIA VANLIGA TELEFONER" page 12  --	1-14
P,X	WO 9836543 A1 (TELIA AB), 20 August 1998 (20.08.98), page 1, line 25 - page 2, line 21; page 3, line 7 - line 10; page 4, line 11 - page 7, line 20; page 10, line 23 - line 28  -- -----	1-14

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

07/04/99

International application No.  
**PCT/NO 98/00253**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9714238 A1	17/04/97	EP 0855114 A	29/07/98
		NO 981540 A	12/06/98
		PL 327401 A	07/12/98
WO 9716916 A1	09/05/97	AU 7682196 A	22/05/97
		CA 2238867 A	09/05/97
		EP 0873637 A	28/10/98
WO 9727692 A1	31/07/97	CA 2243655 A	31/07/97
		EP 0886936 A	30/12/98
WO 9836543 A1	20/08/98	AU 2524897 A	22/10/97
		SE 9700516 A	15/08/98

**THIS PAGE BLANK (USPTO)**